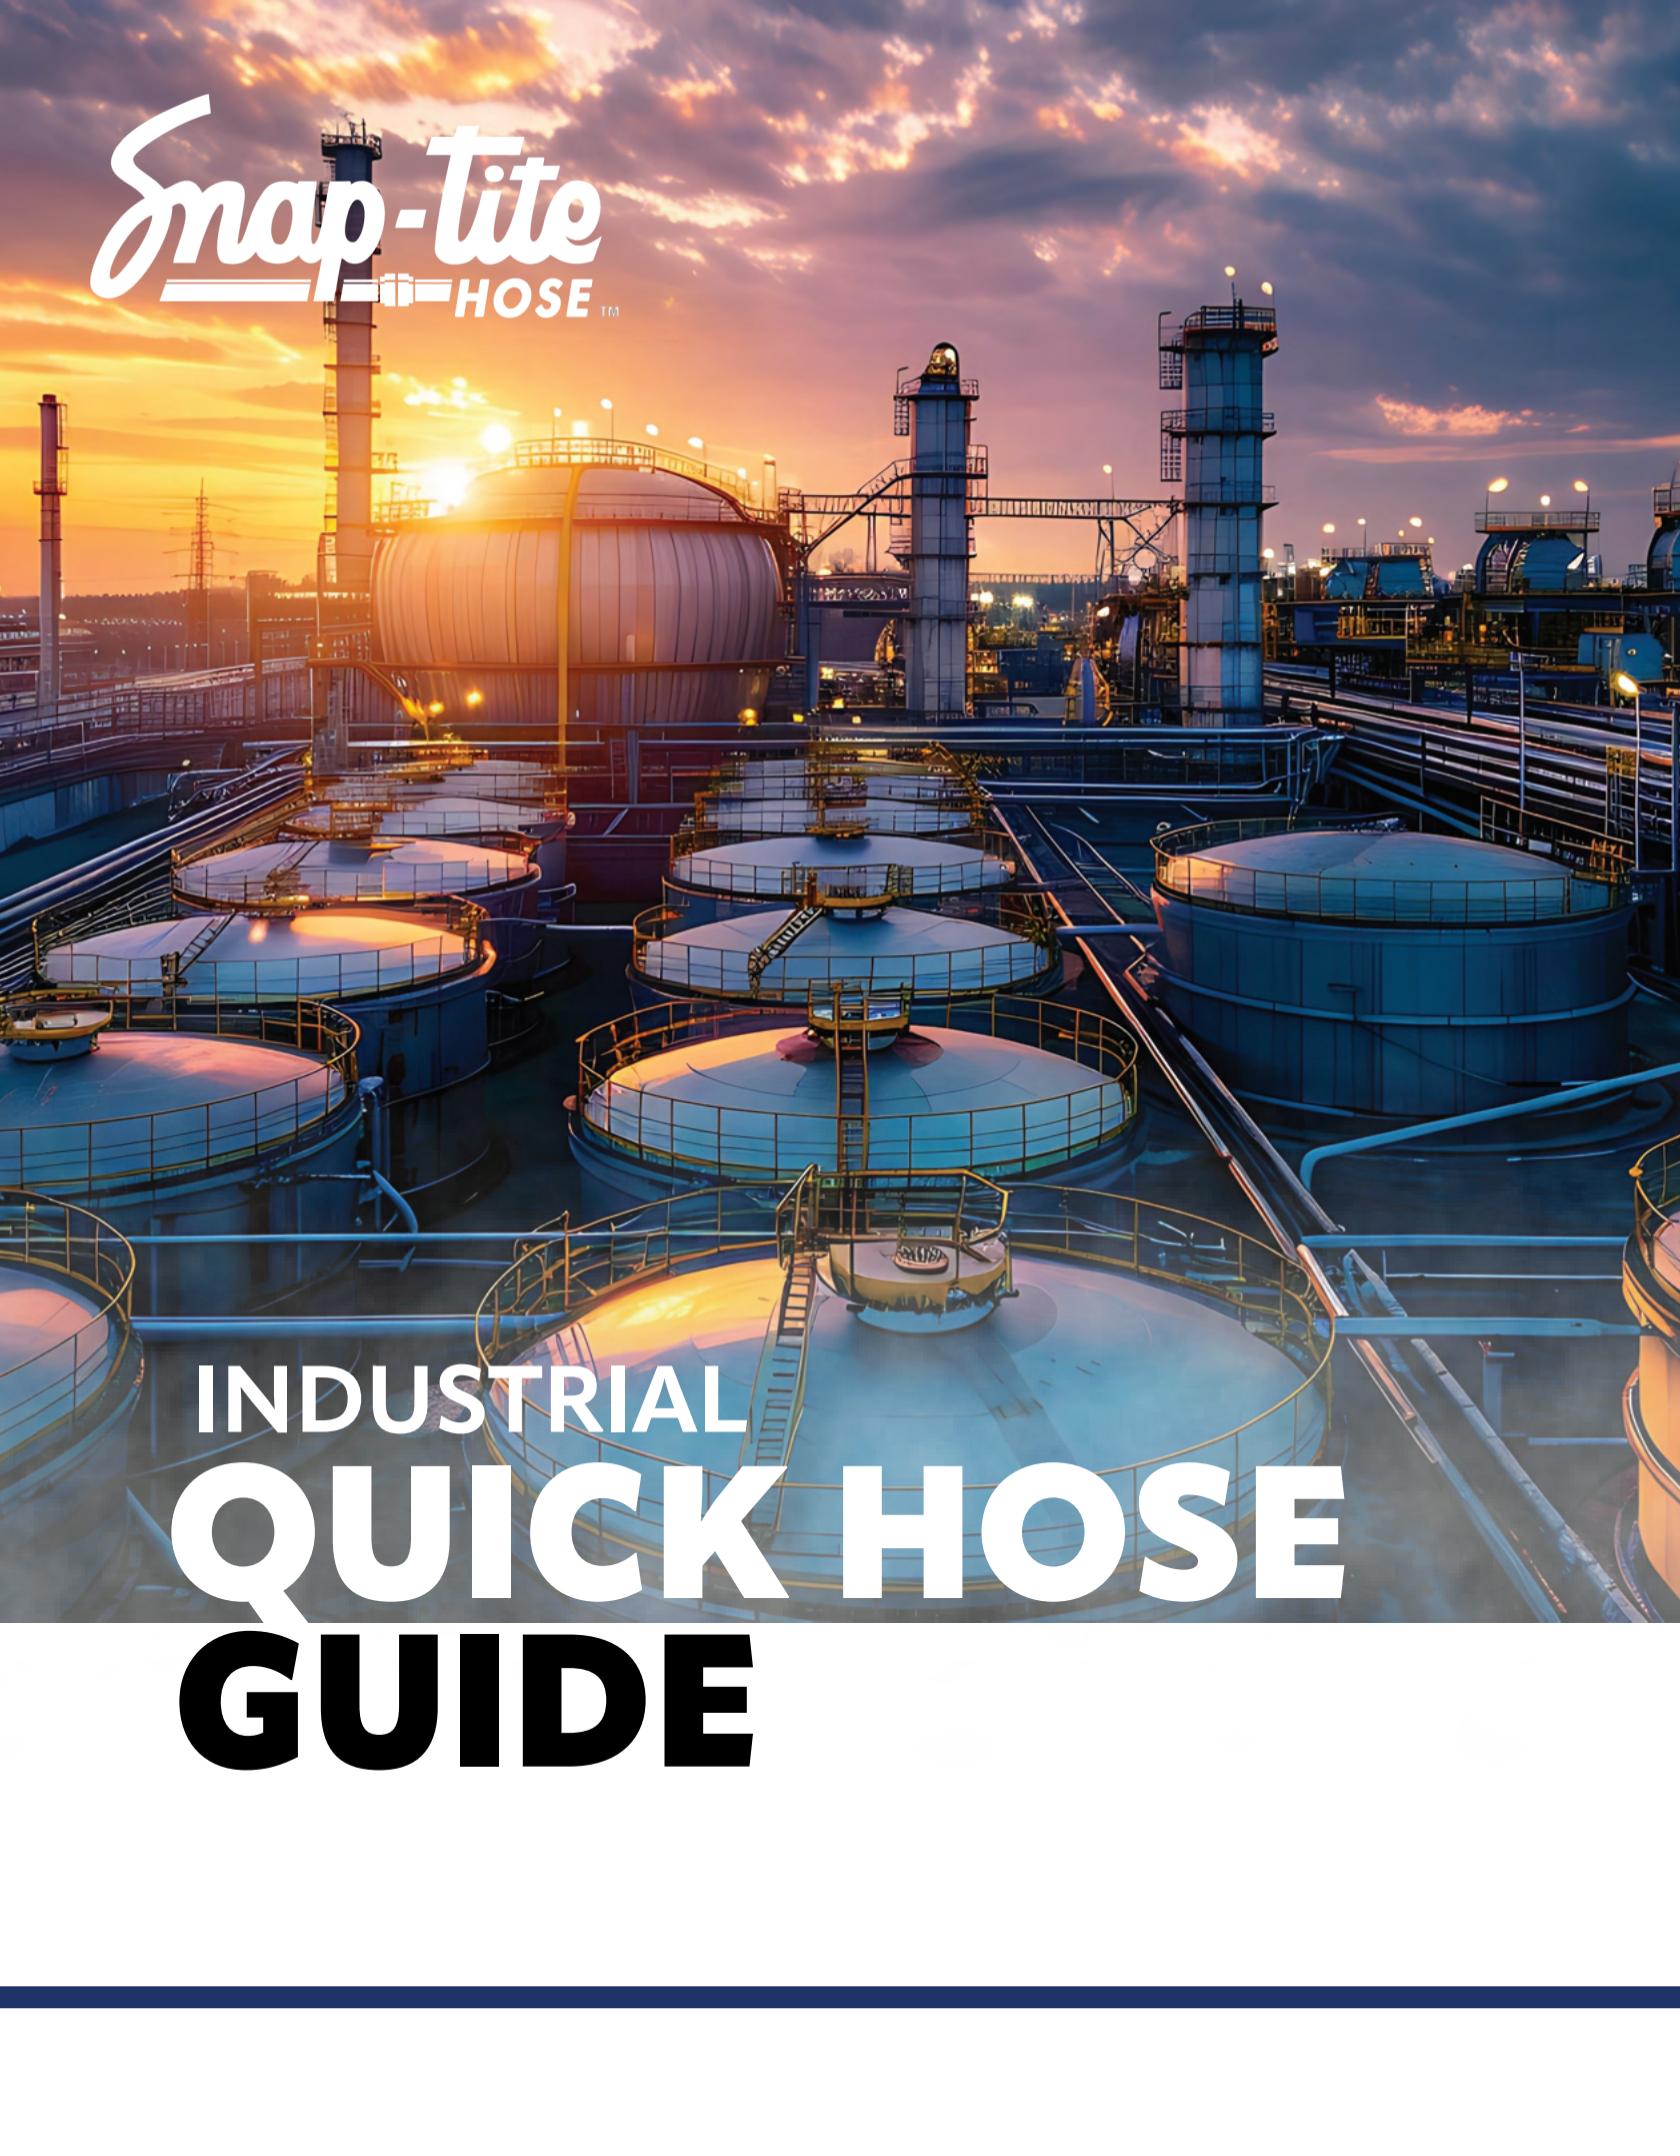


The logo for Snap-Tite HOSE features the brand name in a stylized, white, cursive font. Below the name is a small icon of a hose reel, followed by the word "HOSE" in a bold, white, sans-serif font. A trademark symbol (TM) is located at the end of the word "HOSE".

**Snap-Tite**  
HOSE™

The background of the entire page is a photograph of an industrial facility, likely a refinery or chemical plant, during sunset. The sky is filled with vibrant orange and yellow clouds. In the foreground and middle ground, there are several large, cylindrical storage tanks with blue and white horizontal stripes. A complex network of pipes, walkways, and structural steel is visible throughout the scene. The lighting is dramatic, with the sun low on the horizon, casting long shadows and illuminating the tanks and pipes with a warm glow.

**INDUSTRIAL  
QUICK HOSE  
GUIDE**

## ICON GUIDE:



**AMERICAN MADE**

**ISO 9001: 2015 CERTIFIED QUALITY MANAGEMENT SYSTEM**



**1-YEAR WARRANTY**



**LIFETIME WARRANTY AGAINST DELAMINATION**



**KLEAN HOSE**



**ATTACK HOSE**



**SUPPLY LINE HOSE**



**SOFT SUCTION HOSE**



**POTABLE WATER HOSE**



**MILITARY HOSE**



**OIL & GAS HOSE**



**AGRICULTURAL HOSE**



## PRODUCT OFFERINGS



### CONQUEST™ LDH



- Patented double jacketed fire hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose.
- Outstanding flow and low friction loss.
- Suitable for CAFS and foam concentrates.
- The polyurethane lining materials meets NSF/ANSI Standard 61 for drinking water.
- Application: Attack, Supply, CAFS, Potable Water.

**SIZES:** 4", 5", 6"

**COLORS:**      ☐ COATED ☐ UNCOATED

### 8D™



- Double jacketed EPDM rubber lined hose made from 100% high tensile strength polyester yarn.
- Recommended flow pressure: 100 psi.
- Highly resistant to ozone and oxidation.
- Application: Attack.

**SIZES:** 1", 1-1/2", 1-3/4", 2", 2-1/2", 3"

**COLORS:**      ☐ COATED ☐ UNCOATED

### 8T™



- Double jacketed polyurethane lined hose made from 100% high tensile strength polyester yarn.
- Recommended flow pressure: 100 psi.
- Polyurethane lining material meets NSF/ANSI Standard 61 for drinking water.
- Application: Attack.


**SIZES:** 1-1/2", 1-3/4", 2-1/2", 3"

**COLORS:**      ☐ COATED ☐ UNCOATED




\*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.
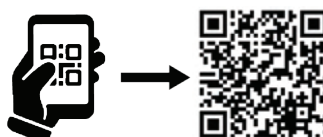
### SCAN ME TO LEARN MORE



### CONTACT US

-  814-438-7616
-  customerservice@snaptitehose.com
-  snaptitehose.com



## PRODUCT OFFERINGS



### 5P™



- Single jacket, polyester, EPDM rubber lined hose.
- Resistent to most petrochemicals.
- Available with aluminum or brass couplings.
- Applications: Industrial.

**SIZES:** 1-1/2", 2", 2-1/2"

**COLORS:**   UNCOATED



### LD™



- Extruded thru-the-weave, nitrile rubber fire hose with reinforcement via circular woven, polyester, and nylon fibers.
- Highly resistant to both conductive and radiant heat.
- Lightweight and kink resistant at low pressures makes this hose superior for high rise firefighting.
- Application: Attack.

**SIZES:** 1", 1-1/2", 1-3/4", 2", 2-1/2", 2-3/4"

**COLORS:**   



### UTX™



- Woven, polyester jacket construction with an extruded thru-the-weave polyurethane cover and liner.
- UTX™ is the most compact, flexible, and lightest LDH on the market.
- Resists ozone, oxidation, and most chemical/petroleum products.
- Ergonomically designed and constructed to be up to 30 lbs (per 100 ft) lighter than conventional LDH.
- Application: Supply.


**SIZES:** 4", 5"

**COLORS:**   BLAZE  HI-VIZ



\*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.
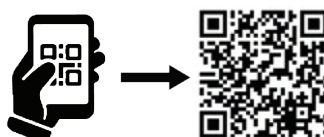
### SCAN ME TO LEARN MORE



### CONTACT US

 814-438-7616  
 customerservice@snapititohose.com  
 snapititohose.com



## PRODUCT OFFERINGS



### TPX™



- 3-ply nitrile rubber cover/liner with polyester inner jacket.
- Unique 3-ply design affords incredible strength but with a lightweight profile, making it easy to manage on the fireground and virtually eliminating snaking.
- Lays flat, requiring less hose bed space than typical extruded hose.
- TPX™ Application: Attack.
- TPX™ LDH Application: Supply.

**SIZES:** 1-1/2", 1-3/4", 2", 2-1/2", 3", 4", 5", 6", 8"

**COLORS:**    




### ATX™



- Heavy gauge 3-ply nitrile rubber cover/liner with polyester inner jacket.
- Smooth liner keeps friction loss to a minimum for greater flow.
- Engineered to meet the requirements of high pressure applications. Designed for relay pumping, pressurizing standpipes and sprinkler systems.
- Application: Attack, Supply.

**SIZES:** 4", 5", 6"

**COLORS:**   

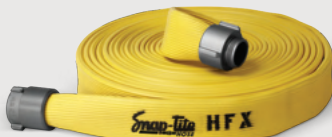

### HFX™



- Extruded thru-the-weave, nitrile rubber construction with a polyester and nylon reinforcing jacket.
- Construction creates a concentric, flexible, and maneuverable hose that is also easy to pack.
- Ribs on the cover surface greatly increase abrasion resistance and help provide a long service life.
- HFX™ Application: Attack.
- HFX™ LDH Application: Supply.


**SIZES:** 1", 1-1/2", 1-3/4", 2", 2-1/2", 3", 4", 5", 6"

**COLORS:**  

\*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

### SCAN ME TO LEARN MORE

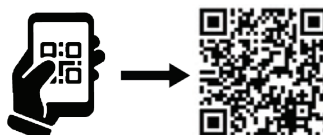

### CONTACT US

- 📞 814-438-7616
- ✉ [customerservice@snaptitehose.com](mailto:customerservice@snaptitehose.com)
- 🌐 [snaptitehose.com](http://snaptitehose.com)



## PRODUCT OFFERINGS

### XLF™



- The XLF™ inner jacket is designed with 100% high tenacity polyester yarn and extruded thru-the-weave polyurethane.
- Designed pressure: 200 - 300 psi.
- Multi-purpose large diameter hose for oil/gas, water transfer, dewatering refineries for tank fire suppression, nuclear, agriculture, military, and water/sewer bypass during construction.
- The polyurethane lining materials meets NSF/ANSI Standard 61 for drinking water.
- Application: Agriculture, Industrial, Military

**SIZES:** 1-1/2", 1-3/4", 2", 2-1/2", 3", 4", 5", 6", 7-1/4", 8", 10"

**COLORS:**  




\*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

### SCAN ME TO LEARN MORE



### CONTACT US

-  814-438-7616
-  [customerservice@snaptitehose.com](mailto:customerservice@snaptitehose.com)
-  [snaptitehose.com](http://snaptitehose.com)

## NOTES:



